

<b>REPORT DOCUMENTATION PAGE</b>					<i>Form Approved</i> OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. <b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b>						
<b>1. REPORT DATE (DD-MM-YYYY)</b> 11-09-2015		<b>2. REPORT TYPE</b> Final			<b>3. DATES COVERED (From - To)</b> 14 May 2014 – 13 May 2015	
<b>4. TITLE AND SUBTITLE</b>  The Colloidal Stability of Magnetic Nanoparticles in Ionic Liquids				<b>5a. CONTRACT NUMBER</b> FA2386-14-1-4062		
				<b>5b. GRANT NUMBER</b> Grant 14IOA088 AOARD-144062		
				<b>5c. PROGRAM ELEMENT NUMBER</b> 61102F		
<b>6. AUTHOR(S)</b>  Prof Brian Hawkett				<b>5d. PROJECT NUMBER</b>		
				<b>5e. TASK NUMBER</b>		
				<b>5f. WORK UNIT NUMBER</b>		
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> University of Sydney KCPC Chemistry F11 Univ Sydney Sydney 2006 Australia					<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>  N/A	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>  AOARD UNIT 45002 APO AP 96338-5002					<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b>  AFRL/AFOSR/IOA(AOARD)	
					<b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b> AOARD-144062	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b>  Approved for public release.						
<b>13. SUPPLEMENTARY NOTES</b>						
<b>14. ABSTRACT</b> During the reporting period the development of the ionic liquid ferrofluid (ILFF) based on EMIM-NTf2 was continued. The stabilizer anchoring group was changed from the bulky poly acryloxyethylphosphate to a less bulky poly acrylic acid based group, simplifying the synthesis and allowing the overall polymer content of the ILFF to be reduced. Supply of this ILFF was maintained to Brad King at Michigan Tech. We have also extended our collaboration to include Professor Juan Fernandez de la Mora of Yale University, for whom we designed and prepared an ethylammonium nitrate (EAN) miscible ferrofluid based on the high-boiling-point solvent sulfolane. As part of this collaboration we have also been investigating new ferrofluids based on other high-boiling solvents.						
<b>15. SUBJECT TERMS</b>  Electric Propulsion, Ionic liquids						
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>  SAR	<b>18. NUMBER OF PAGES</b>  4	<b>19a. NAME OF RESPONSIBLE PERSON</b> Ingrid J. Wysong, Ph.D.	
<b>a. REPORT</b>  U	<b>b. ABSTRACT</b>  U	<b>c. THIS PAGE</b>  U			<b>19b. TELEPHONE NUMBER (Include area code)</b> +81-3-5410-4409	

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>11 SEP 2015</b>		2. REPORT TYPE <b>Final</b>		3. DATES COVERED <b>14-05-2014 to 13-05-2015</b>	
4. TITLE AND SUBTITLE <b>The Colloidal Stability of Magnetic Nanoparticles in Ionic Liquids</b>			5a. CONTRACT NUMBER <b>FA2386-14-1-4062</b>		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER <b>61102F</b>		
6. AUTHOR(S) <b>Brian Hawkett</b>			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>University of Sydney,KCPC Chemistry F11 Univ Sydney,Sydney 2006,Sydney 2006,AU,2006</b>			8. PERFORMING ORGANIZATION REPORT NUMBER <b>N/A</b>		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) <b>AOARD, UNIT 45002, APO, AP, 96338-5002</b>			10. SPONSOR/MONITOR'S ACRONYM(S) <b>AFRL/AFOSR/IOA(AOARD)</b>		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) <b>AOARD-144062</b>		
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>During the reporting period the development of the ionic liquid ferrofluid (ILFF) based on EMIM-NTf2 was continued. The stabilizer anchoring group was changed from the bulky poly acryloxyethylphosphate to a less bulky poly acrylic acid based group, simplifying the synthesis and allowing the overall polymer content of the ILFF to be reduced. Supply of this ILFF was maintained to Brad King at Michigan Tech. We have also extended our collaboration to include Professor Juan Fernandez de la Mora of Yale University, for whom we designed and prepared an ethylammonium nitrate (EAN) miscible ferrofluid based on the high-boiling-point solvent sulfolane. As part of this collaboration we have also been investigating new ferrofluids based on other high-boiling solvents.</b>					
15. SUBJECT TERMS <b>Electric Propulsion, Ionic liquids</b>					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>4</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

**“The Colloidal Stability of Magnetic Nanoparticles in Ionic Liquids”**

**Date: 08/03/2015**

**Name of Principal Investigators (PI):** A/Professor Brian Hawke

- e-mail address : brian.hawke@sydney.edu.au
- Institution : The University of Sydney
- Mailing Address: KCPC, Chemistry F11, The University of Sydney, NSW 2006. Australia
- Phone : +61 2 9351 6973
- Fax : +61 2 9351 8651

Period of Performance: 05/14/2014 – 05/13/2015

**Abstract:** During the reporting period the development of the ionic liquid ferrofluid (ILFF) based on EMIM-NTf<sub>2</sub> was continued. The stabilizer anchoring group was changed from the bulky poly acryloxyethylphosphate to a less bulky poly acrylic acid based group, simplifying the synthesis and allowing the overall polymer content of the ILFF to be reduced. Supply of this ILFF was maintained to Brad King at Michigan Tech. We have also extended our collaboration to include Professor Juan Fernandez de la Mora of Yale University, for whom we designed and prepared an ethylammonium nitrate (EAN) miscible ferrofluid based on the high-boiling-point solvent sulfolane. As part of this collaboration we have also been investigating new ferrofluids based on other high-boiling solvents.

**Introduction:** To the best of our knowledge, at the time of writing, our group is still the only group to have demonstrated an ability to prepare a spiking ferrofluid based on a hydrophobic ionic liquid. We have continued to supply Brad King at Michigan Tech. University with ILFFs based on EMIM-NTf<sub>2</sub> and have endeavored to improve and modify the material as required. We have also responded to the need of Juan Fernandez de la Mora of Yale University to have a ferrofluid that is basically non conducting but that is capable of having ions added to increase the conductivity above the essentially non-conducting baseline. To this end we prepared a ferrofluid based on sulfolane that could be blended with EAN. Both Sulfolane and EAN are somewhat more hydrophilic than ideal and work has commenced on more hydrophobic alternatives.

**Experiment:** The preparation of a ferrofluid in sulfolane is described below:

**Synthesis of the sterically stabilized magnetic nanoparticles:**


Magnetic nanoparticles with an average core diameter of 25 nm used in this work were obtained from Sirtex Medical limited, Sydney, Australia. Sterically stabilized iron oxide nanoparticles (SPIONs) were prepared by coating the iron oxide core with the block copolymer poly(acrylic acid)<sub>10</sub>-block-poly(dimethylacrylamide)<sub>60</sub>. Scheme 1 shows the structure of the block copolymer used in this work.

**Preparation of a poly(acrylic acid)<sub>10</sub> -block-poly(dimethylacrylamide)<sub>60</sub> macro-RAFT agent using 2-[[[(butylsulfanyl)-carbonothioyl]sulfanyl]propanoic acid (RAFT-AA<sub>10</sub> -DMA<sub>60</sub>) (Scheme 1).**

A solution of RAFT-COOH (0.26 g, 1.1 mmol), 4,4'-azobis(4-cyanovaleric acid) (0.03 g, 0.1 mmol), and dimethylacrylamide (6.45 g, 65.2 mmol) in dioxane (10 g) and water (10 g) was prepared in a 100 mL round bottom flask. This mixture was then stirred magnetically, purged with nitrogen for 15 minutes, and the reaction carried out at 70°C for 8 h. The homopolymer solution obtained, acrylic acid (0.78 g, 10.9 mmol), and 4,4'-azobis(4-cyanovaleric acid) (0.03 g, 0.1 mmol) were added to a 100 mL round bottom flask. The mixture was deoxygenated by purging with nitrogen for 15 min, and the flask stirred in a 70°C oil bath for 2 h. The copolymer solution, at 27% solids, was then diluted with MQ water to 1.2 wt%. The pH of the diluted copolymer solution was adjusted to 5 with 0.1 M NaOH.

Preparation of ferrofluid in Sulfolane

Ferrofluid in sulfolane was obtained by exchanging the solvent water from the aqueous dispersion of sterically stabilized iron oxide nanoparticles with sulfolane. In a typical process, a solution of 3.4 g dispersion of SPIONs (0.125 g) at 3.7% solids, sulfolane 0.38 g and absolute ethanol 5 g was prepared in 50 ml RBF. The water and ethanol were removed from the mixture by distillation at 40°C under reduced pressure using Rotary evaporator. At the end of this step, the SPIONs were successfully transferred into sulfolane and resulted in a very homogenous one-phase liquid (sulfolane based ferrofluid). Final trace of water was removed by heating the ferrofluid in an oil bath at 90°C under nitrogen flow for 30 min. Ferrofluid in Sulfolane had an iron oxide concentration of 26% (w/w).

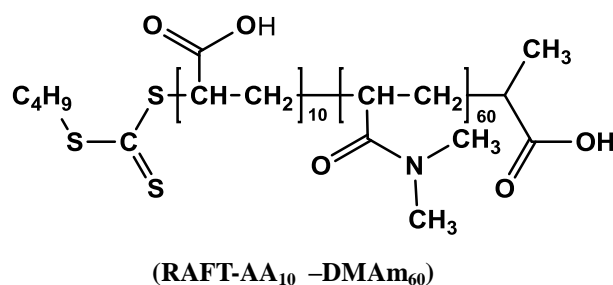

**Scheme 1**, block copolymer used in this study

#### References:

1. Jain N, Wang Y, Jones SK, Hawckett BS, Warr GG. Optimized Steric Stabilization of Aqueous Ferrofluids and Magnetic Nanoparticles. *Langmuir*. 2010/03/16 2010;26(6):4465-4472.
2. Bryce NS, Pham BTT, Fong NWS, et al. The composition and end-group functionality of sterically stabilized nanoparticles enhances the effectiveness of co-administered cytotoxins. *Biomaterials Science*. 2013;1(12):1260-1272.
3. Jain N, Zhang X, Hawckett BS, Warr GG. Stable and Water-Tolerant Ionic Liquid Ferrofluids. *ACS applied materials & interfaces*. 2011/03/23 2011;3(3):662-667.

#### Results and Discussion:

Juan Fernandez de la Mora of Yale University asked for a ferrofluid in sulfolane that could be mixed with ethyl ammonium nitrate to facilitate his contribution to Brad King's project. We formulated the required ferrofluid according to the approach described in the previous section. The new fluid was designed to allow him to vary the conductivity of the fluid at will so that he could examine the impact of low concentration of ions on the electrospray properties of an uncharged fluid. However, sulfolane was found to be quite hygroscopic and, if dry, had quite a high viscosity and melting point. We have now started working with a series of glycol diethers known as glymes to see if they can better serve the purpose.

As follow on projects we propose to continue to design ferrofluids and ionic liquid ferrofluids for the space propulsion project and get a better understanding of their use as propulsion media.

We also propose to team with Brad King's group at Michigan Tech to study composite materials that can be prepared by electrospinning. Electrospinning allows the preparation of sub-micron composite fibers. The fibers are formed when a solvent is evaporated from jets of poly composite solution sprayed into an electric field from various configurations of nozzle. The jet of material is unstable in the electric field and whips around in the air. It is proposed that the stream of fluid can be stabilized by the superposition of a magnetic field.

#### List of Publications and Significant Collaborations that resulted from your AOARD supported project:

a) The previously foreshadowed Langmuir paper was published:

Lyon King, Edmond Meyer, Mark Hopkins, Brian Hawckett and Nirmesh Jain. Self-assembling array of magneto-electrostatic jets from the surface of a superparamagnetic ionic liquid. *Langmuir* 2014, 30(47), 14143-14150.

f) A new collaboration with Professor Juan Fernandez de la Mora of Yale University has been initiated.

**Attachments:** Publication in Langmuir

**DD882:** As a separate document, please complete and sign the inventions disclosure form.